


LASERSHIELD FG1 PRODUCT SPECIFICATION

P.O. Box 159. South Lyon, MI 48178
 Phone: 1-800-521-9746 734-769-5565 Fax: 734-769-1708
 www.noirlaser.com

FG1: EN207 Certified. Luminous transmittance: 75% Clear.

λ [nm]	L-Rating	λ [nm]	OD
850-900	DIR LB3	850-2800	3+
>900-950 + >1400-2200	DIR LB4	900-2600	4+
>950-1000	DIR LB5	950-1010	5+
>1000-1063	DIR LB6	>1010-1500	7+
>1063-1400	D LB6 + IRM LB7Y	>1500-2350	5+
2900-3200 + 10600	DI LB4	>2800-10600	5+

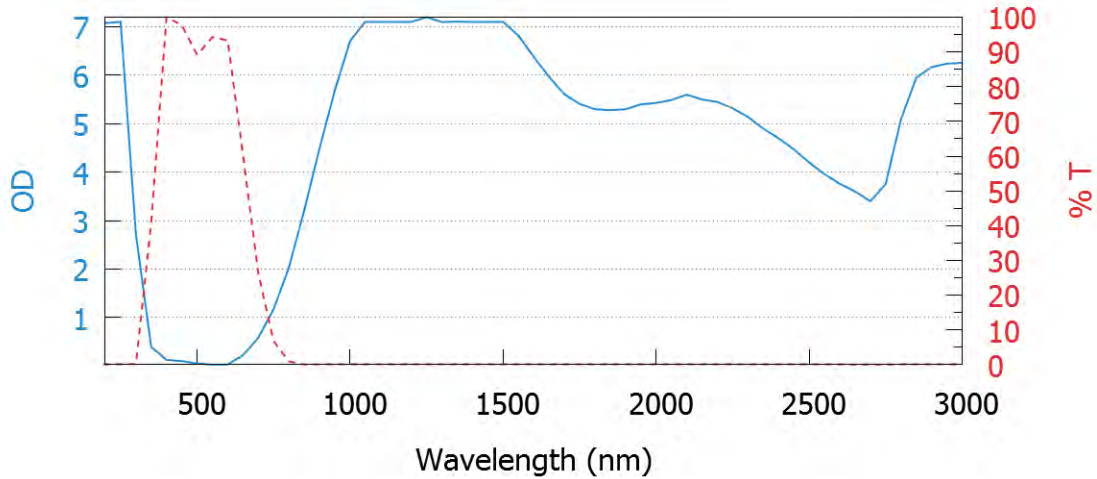

#51 Medium / #53 Large Universal



#55 Wraparound w/Insert

#56 Wraparound



#37 Universal



Date: June 5, 2015.