

NoIR

P.O. Box 159 South Lyon Michigan 48178
Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield DI6

Customer:	Varied
Product Designation (OPN):	DI6
Luminous Transmittance:	35%
Date of Revision:	12/7/12
Edited by:	David W. Bothner


Graphs represent nominal filter characteristics

L-Rating

610-664 + 735-789 DIR LB1
665-<670 + >690-698 DIR LB2
790-<808 + >1050-1080 DIR LB2
670-690 + 808-1050 DIR LB3

Optical Density

610-664 + 735-789nm 1+
665-<670 + >690-698nm 2+
790-<808 + >1050-1080nm 2+
670-690 + 808-1050nm 3+

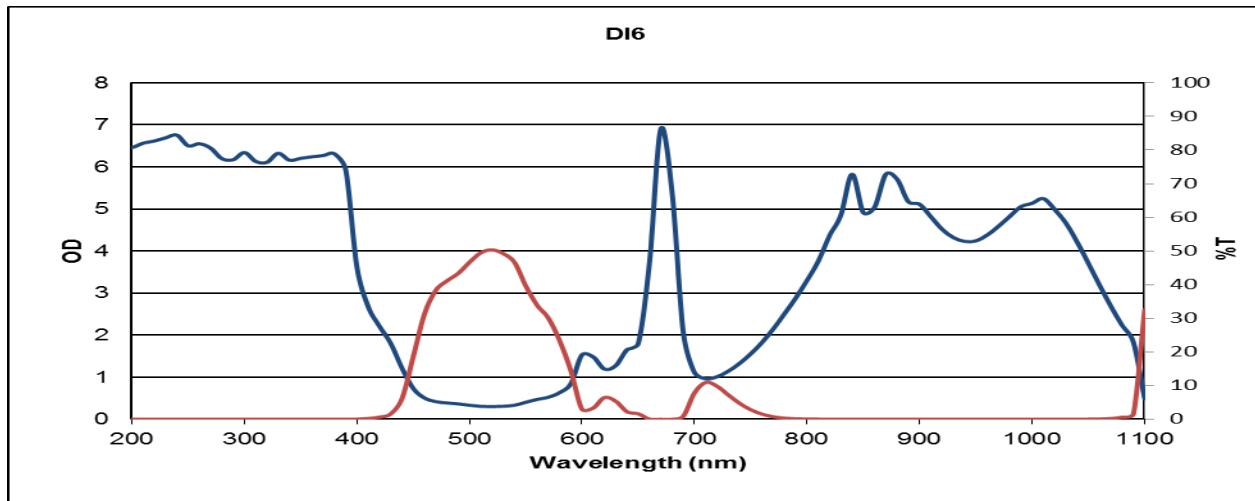

#33 Universal



#35 Wraparound



#34 Wraparound w/Insert



#36 Medium / #38 Large Universal



#50 Goggle w/ Insert



#51 Medium / #53 Large Universal



#52 Wraparound



#55 Wraparound w/Insert



#56 Wraparound



#31 Small / #39 Large Universal



#700 Medium / #900 Large



#60 Goggle