

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield ML3

Customer:	Varied
Product Designation (OPN):	ML3
Luminous Transmittance:	16%
Date of Revision:	12/7/12
Edited by:	David W. Bothner


Graphs represent nominal filter characteristics

L-Rating

190-315 D LB7 + IR LB4
 >315-395 D LB5 + IRM LB6
 630-660 + 800-915 DIR LB3
 >660-670 + 780-920 DIR LB2

Optical Density

190-400nm 5+
 630-660nm + 800-915nm 3+
 660-670nm + 780-920nm 2+

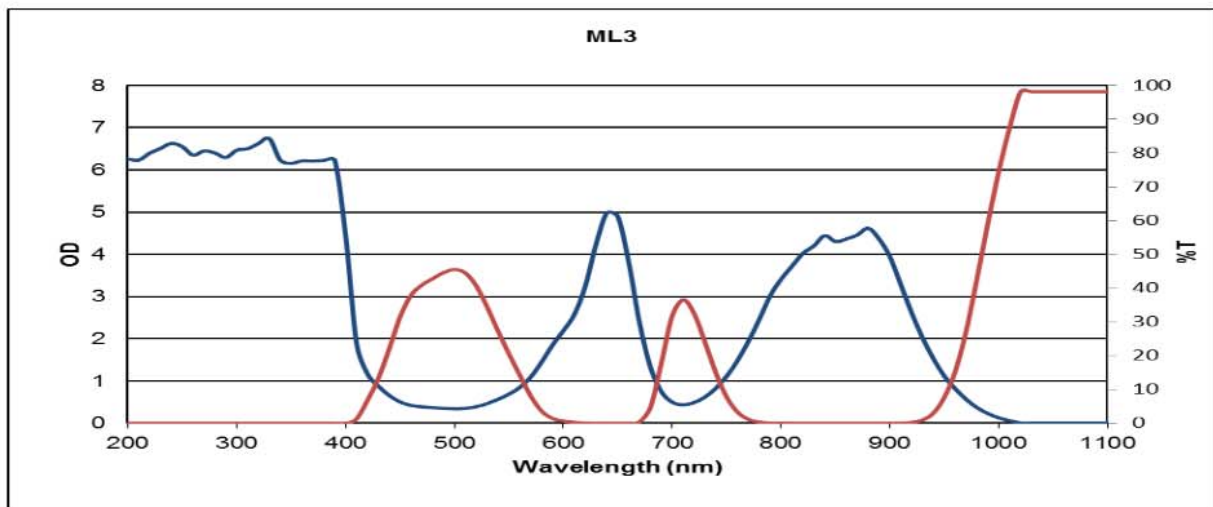

#33 Universal



#35 Wraparound



#34 Wraparound w/Insert



#36 Medium / #38 Large Universal



#50 Goggle w/Insert



#51 Medium / #53 Large Universal



#52 Wraparound



#55 Wraparound w/Insert



#56 Wraparound



#31 Small / #39 Large Universal



#700 Medium / #900 Large



#60 Goggle